

Electrical Characteristics										
Frequency	Hz	50				60				
Voltage (series star)	V	380	400	415	440	415	440	460	480	
Rated power class H	kVA	680	680	680	630	720	780	816	816	
	kW	544	544	544	504	576	624	653	653	
Rated power class F	kVA	630	630	630	585	665	720	756	756	
	kW	504	504	504	468	532	576	605	605	
Regulation with	DSR	±1% with any power factor and speed variations between -5% +30%								
Insulation class		H								
Execution		Brushless								
Stator winding		12 ends								
Rotor		with damping cage								
Efficiencies class H	4/4	%	93,9	94,3	94	93,7	95,1	95,6	95,7	95,8
(see graph. for details)	3/4	%	94,4	94,7	94,6	94,3	96,1	96,3	96,4	96,7
	2/4	%	93,7	93,8	93,8	93,6	95,2	95,3	95,4	95,5
	1/4	%	91,2	91	90,8	90,7	92	92,1	92,1	92
Reactances (f. l.cl. F)	Xd	%	249,5	225,2	209,2	172,4	265,8	256,2	245,2	225,2
	Xd'	%	27,0	24,4	22,7	18,7	28,8	27,8	26,6	24,4
	Xd''	%	16,4	14,8	13,7	11,3	17,5	16,8	16,1	14,8
	Xq	%	144,9	130,8	121,5	100,2	154,4	148,8	142,4	130,8
	Xq'	%	144,9	130,8	121,5	100,2	154,4	148,8	142,4	130,8
	Xq''	%	19,3	17,4	16,2	13,3	20,5	19,8	18,9	17,4
	X ₂	%	17,8	16,1	15,0	12,3	19,0	18,3	17,5	16,1
	X ₀	%	2,73	2,46	2,29	1,88	2,90	2,80	2,68	2,46
Short Circuit Ratio	Kcc		0,32	0,44	0,67	1,10	0,24	0,28	0,32	0,44
Time Constants	Td'	sec.	0,13							
	Td''	sec.	0,0157							
	Tdo'	sec.	2,91							
	Tα	sec.	0,0422							
Short Circuit Current Capacity		%	>300				>350			
Excitation at no load	Amp.		0,6	0,7	1	1,2	0,4	0,5	0,6	0,7
Excitation at full load	Amp.		4,3	4,4	4,7	4,9	3,5	3,6	3,7	3,9
Overload (long-term)		%	1 hour in a 6 hours period 110% rated load							
Overload per 20 sec.		%	300							
Stator Winding Resistance (20°C)	Ω		0,0042							
Rotor Winding Resistance (20°C)	Ω		1,5							
Exciter Resistance (20 °C)	Ω		Rotor : 0,050				Stator : 8,85			
Heat dissipation at f.l.cl.H	W		35340	32882	34723	33887	29678	28720	29332	28620
Telephone Interference			THF < 2%				TIF < 40			
Radio interference			EN61000-6-3, EN61000-6-1. For others standards apply to factory							
Waveform Distors.(THD) at f. load	LL/LN %		2,1 / 2,1							
Waveform Distors.(THD) at no load	LL/LN %		2,4 / 2,4							
Mechanical characteristics										
Protection			IP 21 (other protection on request)							
DE bearing			6322							
NDE bearing			6318.2RS							
Weight of wound stator assembly	kg		641							
Weight of wound rotor assembly	kg		386,7							
Weight of complete generator	kg		1586							
Maximun overspeed	rpm		2250							
Unbalanced magnetic pull at f.l.cl.F	kN/mm		6,8							
Cooling air requirement	m ³ /min		54				64,8			
Inertia Constant (H)	sec.		0,172				0,207			
Noise level at 1m/7m	dB(A)		94 / 82				98 / 88			

All technical data are to be considered as a reference and they can be modified without any notice.










This document is a propriety of Mecc Alte S.p.A.. All rights reserved.



GENERATOR TYPE ECO 40-2L/4

Document : DS026A/2
issue 007 date : 01/06/2011

50 Hz

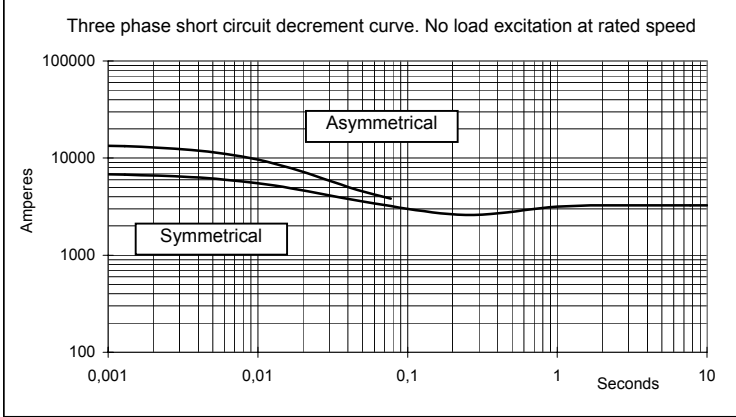

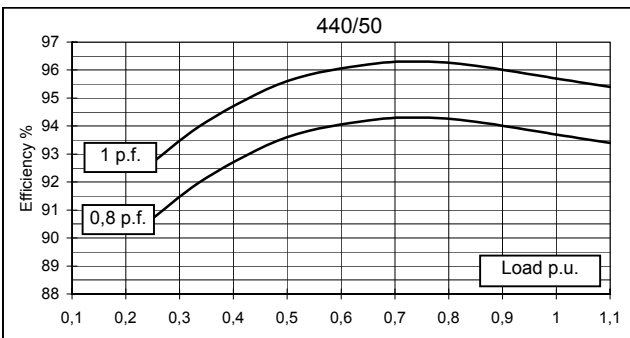

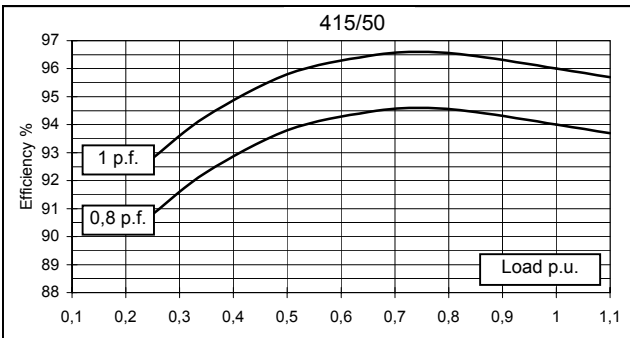

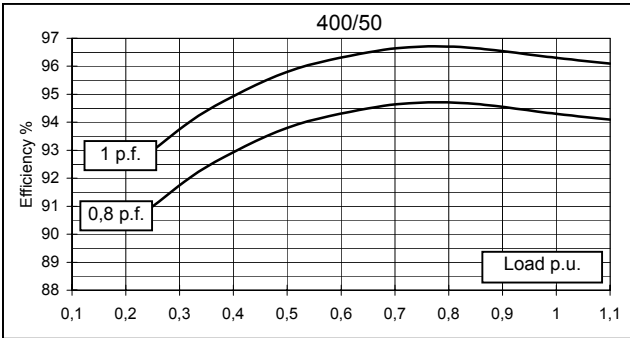

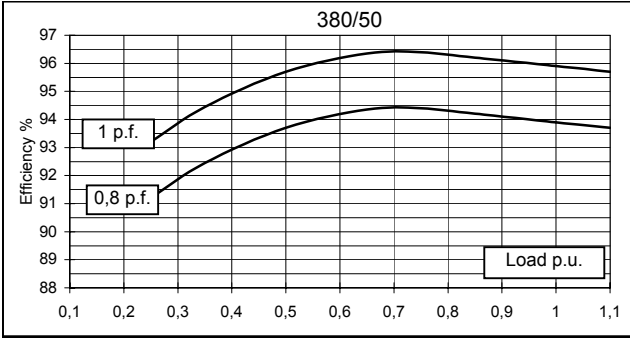





GENERATOR TYPE ECO 40-2L/4

Document : DS026A/3
issue 007 date : 01/06/2011

60 Hz

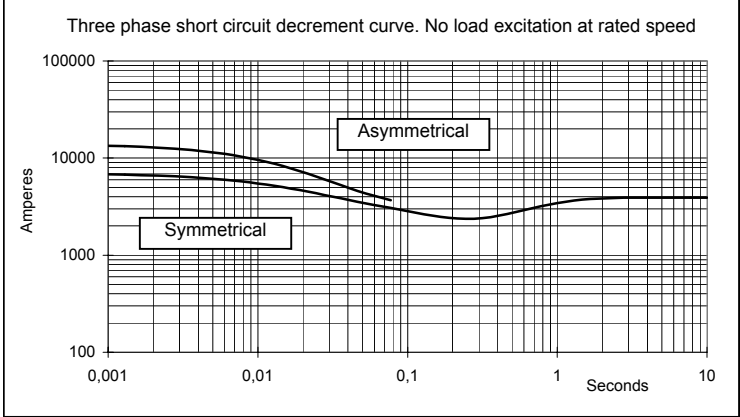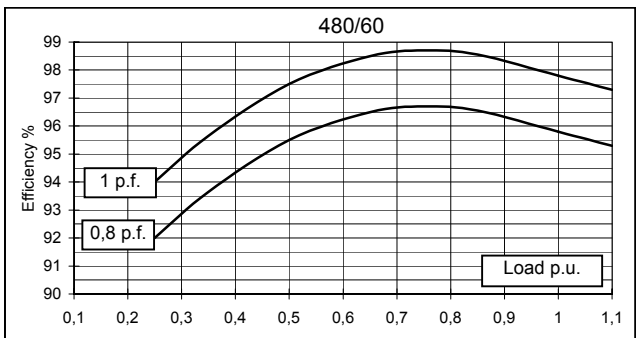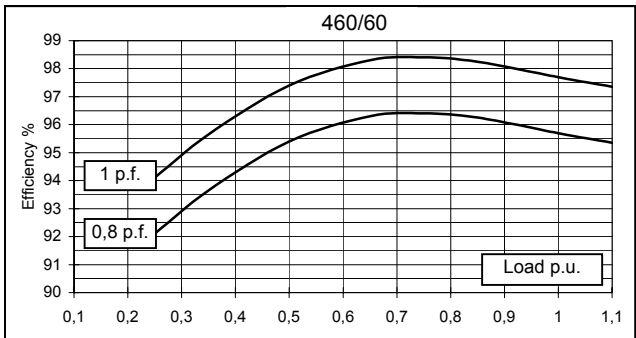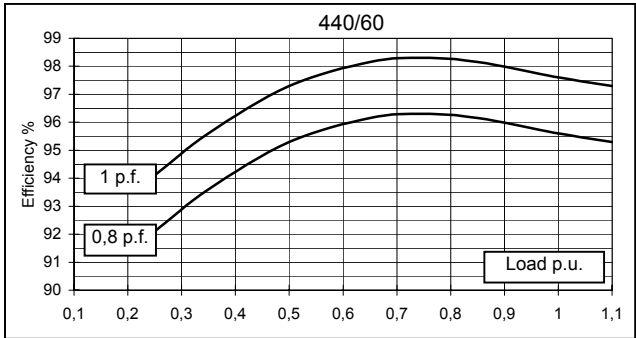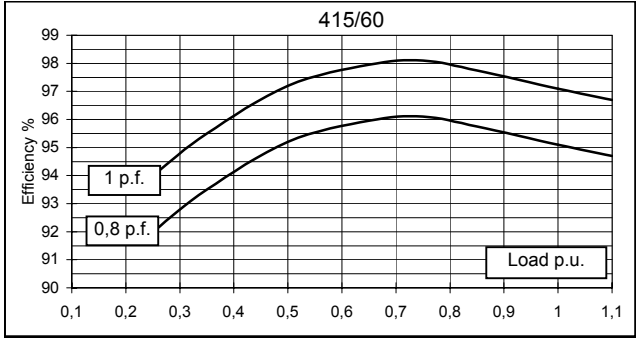


TWO BEARING MOMENTS OF INERTIA

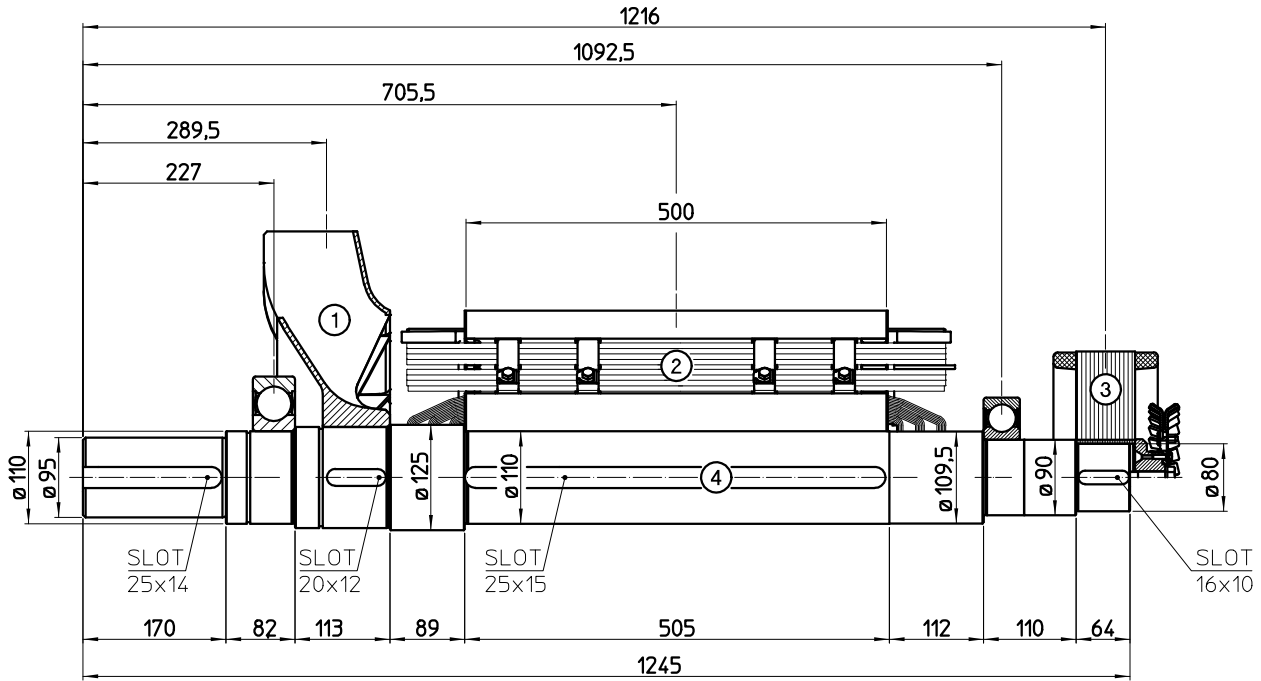


COMPONENT	WEIGHT kg	J kgm ²
1 FAN	10,2	0,335
2 MAIN ROTOR	386,7	8,234
3 EX. ROTOR	35	0,562
4 SHAFT	85,7	0,127
TOTAL	517,6	9,258

TWO BEARING DIMENSIONS

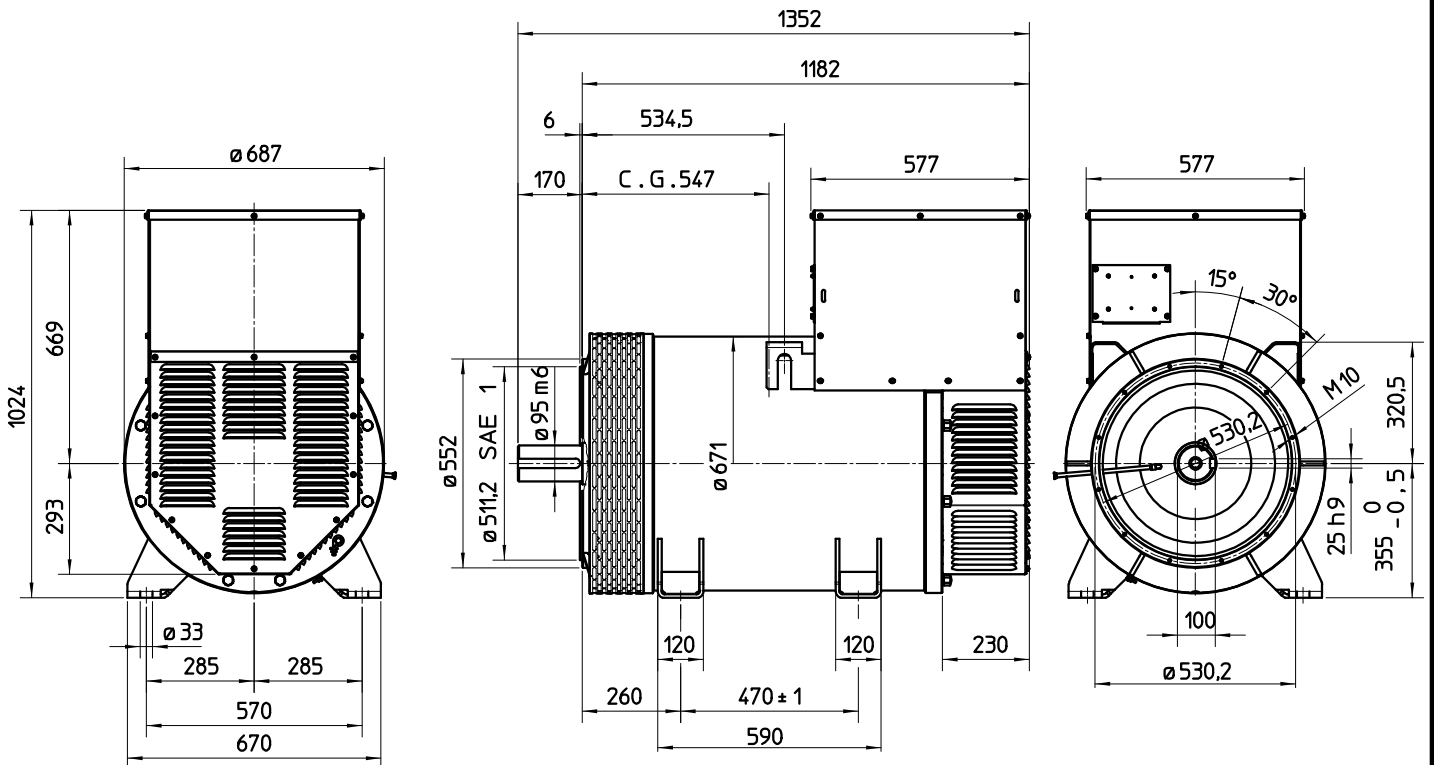

C.G.= GRAVITY CENTER


SINGLE BEARING MOMENTS OF INERTIA

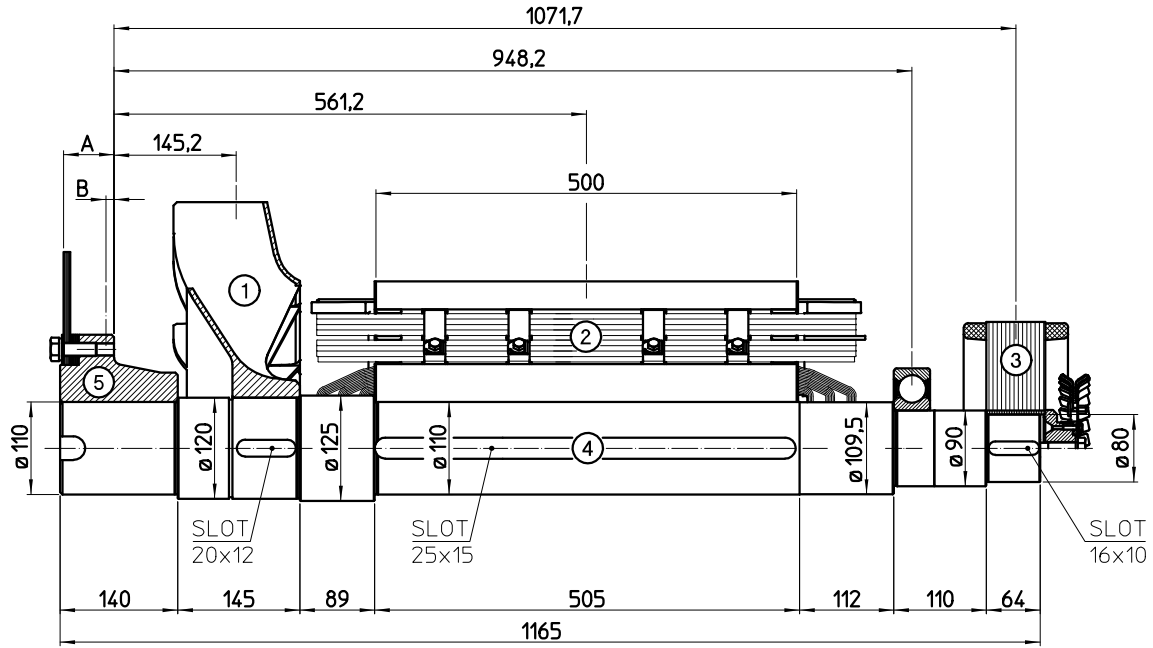

COMPONENT	WEIGHT kg	J kgm ²
1 FAN	10,2	0,335
2 MAIN ROTOR	386,7	8,234
3 EX. ROTOR	35	0,562
4 SHAFT	84,2	0,129
TOTAL	516,1	9,26

Sae No	SHAFTS COUPLING FLEX PLATE			
	A	B	WEIGHT kg	J kgm ²
14	60	9,6	41,4	0,511
18	50	6,6	45,1	0,858

SINGLE BEARING DIMENSIONS

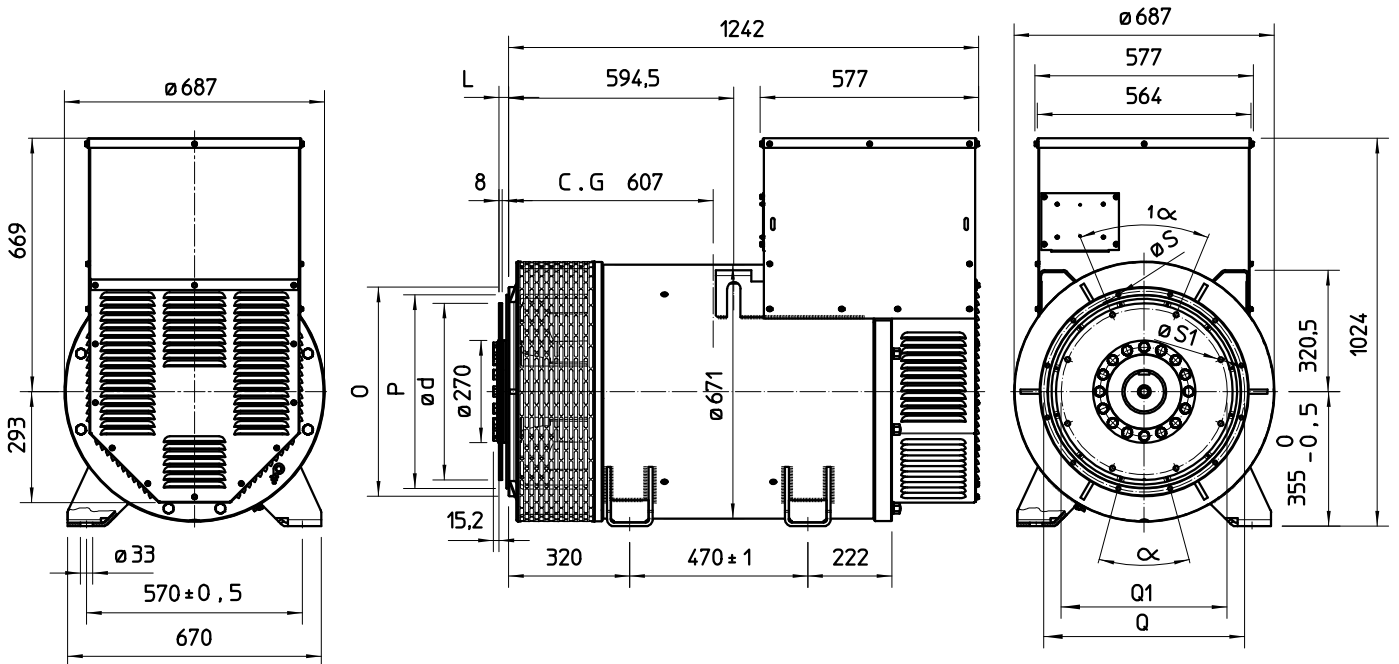

SAE N.	FLANGIA / FLANGE BRIDE / FLANSCH					
	O	P	Q	N. FORI	S	α
1	552	511,2	530,2	12	11	30°
1/2	648	584,2	619,1	12	14	30°
0	711	647,7	679,5	16	14	22,5°
00	883	787,4	850,9	16	14	22,5°

VOL. N.	GIUNTI A DISCHI / DISC COUPLING DISCQUE DE MONOPALIER / SCHEIBENKUPPLUNG					
	L	d	Q1	N. FORI	S1	α1
14	25,4	466,72	438,15	8	14	45°
18	15,7	571,5	542,92	6	17	60°

C.G.= GRAVITY CENTER